




BASS FACE

Instruction Manual

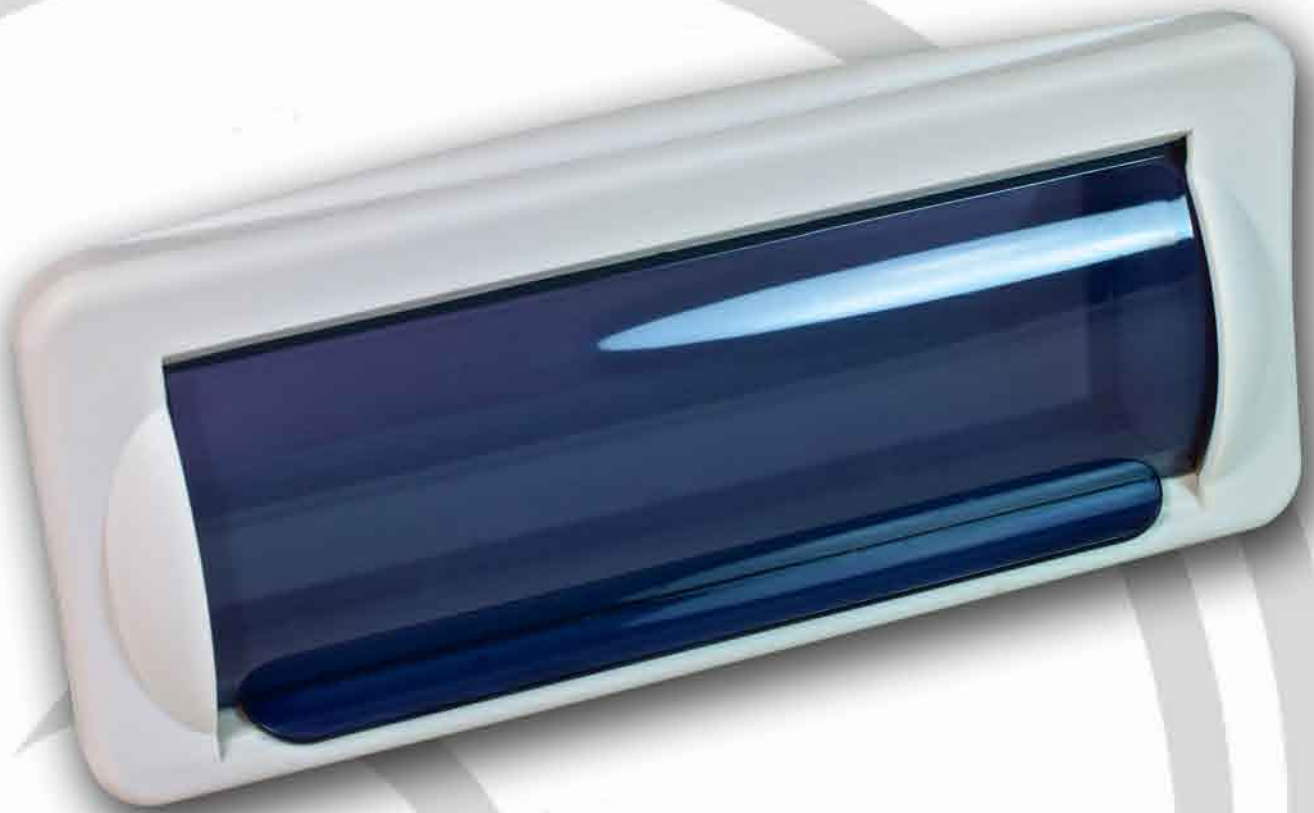

MODEL

ACC.I

!Warning!

Bass Face products can produce sound pressure levels that can permanently damage your hearing. Please exercise extreme caution when setting volume levels. Also be mindful of other listeners, they might not enjoy listening at the same levels as you. We will not be held in any way responsible for injuries caused by the misuse of our products.

Please take care when attempting any alterations or installations with the electrical system of the car. ALWAYS disconnect the positive terminal at the battery.

Bass Face operates a policy of continuous improvement and reserves the right to update and alter the content and design of both product and instructions as it sees fit. Although the information contained in the instruction manuals is given in good faith based on extensive testing and experience the final responsibility for the installation and operation of your system must rest with the installer and the operator. If you are installing your equipment yourself please be realistic about your abilities and seek professional advice if you are unsure about any aspect of the task that you are undertaking.

If you face a particular problem with your installation or product we will be happy to answer your questions. Please email info@bassfaceaudio.co.uk - please note that our response time is 2 to 3 days, and that we are closed over the weekend. For more urgent help please contact your country distributor. In the UK this is Thompsons Ltd (www.thompsonsltd.co.uk)

Please note that Bass Face is unable to process warranty support directly. For warranty support you MUST contact your distributor.

Introduction:

Firstly, thank you for your purchase. Every element of this product has been optimised to give you the best possible performance for your money. We think that Bass Face represents the highest quality to price ratio available on the market today.

Please take the time to read these instructions carefully. You will need to follow them to have a successful install and get the most from the product.

Do remember that incorrect installation or abuse is NOT covered under warranty – it is YOUR responsibility to make sure that your installation and partnered product is suitable and compatible.

1. Use the provided rubber mount gasket to draw a template where you wish to cut, check behind the panel you are cutting for obstructions behind and use a non permanent marker to make the outline.
2. Drill a pilot hole in one of the corners of sufficient width to insert your jigsaw bit – observe tool safety such as protective glasses and gloves.
3. Slowly and carefully cut the line until an opening is present the same size as the gasket piece, sand any sharp edges and clean the surface around the hole so it is free from dust/dirt.
4. Carefully unclip the outer trim of the cover, insert the splash cover body it into the hole to check fitment and mark the four screw holes.
5. Drill a pilot hole for each of the four screws, place the gasket on the rear of the cover (Ensuring to remove the sticky back plastic), secure the cover into the hole using screws suitable for the material you have cut into.
6. Refit the outer trim. Pressing it into place firmly all the way round. Now you are ready to fit your head unit.